

深圳市登博照明有限公司

Shenzhen Blossom Lighting Co., Limited

— 2023 —

Focus On LED Recessed & Surface Mount Light For North American Markets





ABOUT US

Shenzhen Blossom Lighting Co., Limited was established in 2015 and with rich experience and solid background in the product categories of traditional recessed can lights, closed to ceiling lights, the company founded the R&D and sales center in Shenzhen and then set up fully-owned production base in Jiangmen. It has been committed to providing solutions for residential and commercial requirements of energy saving LED recessed lights, surface mounted downlights and flush mount closed to ceiling lights from the North American market.

Our product range includes recessed canless flat panels, gimbals, and edgilit slim surface mount, low profile disc ceiling, emergency battery backup flush mount, etc., all of which have been obtained North American cETLus certificate, most of which have applied for North American Energy Star and California Title 24 certificates. With keen market sense, we have been working closely with Tuya Smart and WIZ and have certified various smart WiFi or Bluetooth or Zigbee RGB plus CCT changing recessed wafer lights, gimbal kits, flush mount lights for new market demands.

We've been putting quality control in the first priority from incoming materials to online production to finished products, especially for key positions such as LED integration testing, aging testing, IES testing, and dimming testing etc.. The facilities pass the third-party auditing every quarter by Intertek. Customers from the United States, Canada and the United Kingdom expressed satisfaction with the factory's quality control system during the factory audit process.

We have a professional engineering team with 10 years of R&D experience in the LED industry, more than 50 employees. The daily capacity for the time being is over 15K pieces. We provide first-class quality, unique design, reasonable price, logistic support and excellent after-sales service, so we receive more and more product inquiries not only from the United States and Canada, but also from Germany, the United Kingdom etc.

Tell us your idea, we design and produce for you with best cost-performance!

FACTORY BUILDING



CATALOG

01 SMART LIGHTS

Smart Wafer Light	
3 INCH	01
4 INCH	02
6 INCH	03
8 INCH	04
Smart Linear Handy Panel	
1 FT & 2 FT	05
Smart Gimbal Light	
4 INCH & 6 INCH	07
Smart Floating Gimbal	
3.5 INCH & 4INCH	08
Smart Retrofit Kit	
4 INCH & 6 INCH	09
Smart Disc Light	
6 INCH	10
Smart Slim Surface	
12 INCH	11
Smart Double Ring	
10-12-14-16 INCH	12
Smart Single Ring	
11 INCH & 13 INCH	13
Smart Mushroom	
11 INCH & 13 INCH	14
Smart Low Profile & Traditional	
11 INCH & 13 INCH	15

02 SURFACE MOUNT

Emergency Ceiling Light	
6 INCH & 7 INCH	16
Emergency With J-Box	
6 INCH & 7 INCH	17
Emergency Flush Mount	
10 INCH & 14 INCH	18
Low Profile Disc Light	
4 INCH & 6 INCH	19
Flat Disc Light	
4 INCH & 6 INCH	20
Motion Closet Light	
4 INCH & 6 INCH	21

CATALOG

02 SMART MOUNT

Edgelit Slim Surface	
5-6-7-9 INCH	22
12 INCH	23
16 INCH	24
3n1 Slim Surface	
5 INCH & 7 INCH	25
3n1 Flameless Ceiling	
4 INCH & 6 INCH	26
Flat Mini Surface	
4 INCH	27
Double Ring Ceiling	
10-12-14-16 INCH	28
Single Ring Ceiling	
11 INCH & 13 INCH	29
Mushroom Ceiling	
11 INCH & 13 INCH	30
Low Profile & Traditional Ceiling	
11 INCH & 13 INCH	31

03 RECESSED


Deep Regressed	
3.5 INCH	32
Floating Gimbal	
3.5 INCH & 4INCH	33
Multiple Floating Gimbal	
2 HEADS & 3 HEADS	34
Cob Gimbal	
2-3-4 INCH	35
Smd Gimbal	
3-4-6 INCH	36
Nuggets Recessed	
1-3-4-5-9-10 CELLS	37
Micro Ray Trimmed	
5-10-15 CELLS	38
Micro Ray Trimmless	
5-10-15 CELLS	39
Micro Ray Wall Washer	
5-10-15 CELLS	40
Micro Ray Adjustable	
10-15 CELLS	41
Linear Handy Panel	
1 FT & 2FT	42



SMART SLIM WAFER LIGHT KIT 3 INCH

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit WiFi
- 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 6000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for shower top
- No hub required

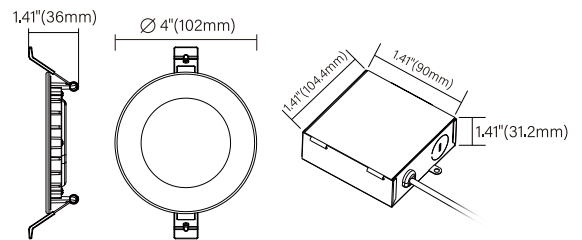


LED-3-S7W-RD-SWF



LED-3-S7W-RD-SWF



LED-3-S7W-SQ-SWF

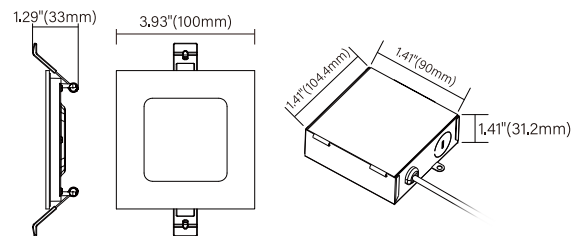


LED-3-S7W-SQ-SWF

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-3-S7W-RD-SWF	120VAC	7 Watts	RGB+CCT	450lm@2700K	Round	Ø 90mm/3.54inch	WH/BK/BN/ORB	ETL, FCC
LED-3-S7W-SQ-SWF	120VAC	7 Watts	RGB+CCT	450lm@2700K	Square	Ø 90mm/3.54inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice



LED-4-S9W-RD-SWF

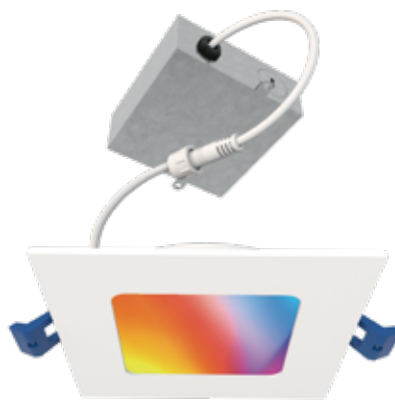

LED-4-S9W-SQ-SWF


Powered by **tuya** WiFi Works with **Hey Google** **Amazon Alexa**

Intertek **FC** **IC** Rated WET LOCATION AIR TIGHT


SMART SLIM WAFER LIGHT KIT 4 INCH

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit WiFi
- 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 6000K turnable white
- 38 dynamic scenario
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for outdoor soffits
- No hub required

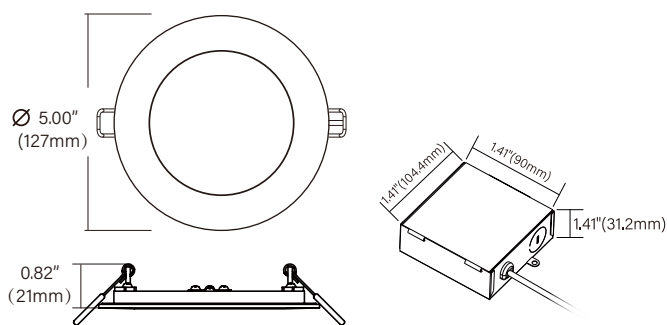

LED-4-S9W-RD-SWF

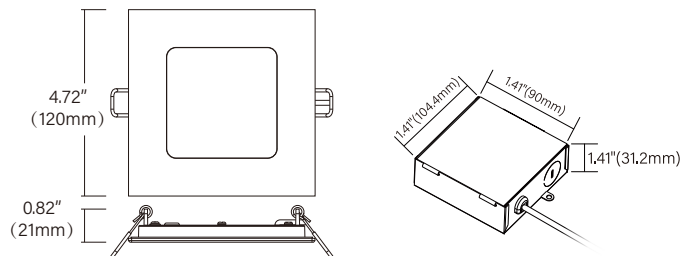

LED-4-S9W-SQ-SWF

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-4-S9W-RD-SWF	120VAC	9 Watts	RGB+CCT	600lm@2700K	Round	Ø 108mm/4.25inch	WH/BK/BN/ORB	ETL, FCC
LED-4-S9W-SQ-SWF	120VAC	9 Watts	RGB+CCT	600lm@2700K	Square	Ø 108mm/4.25inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice



LED-6-S13W-RD-SWF




LED-6-S13W-SQ-SWF

Powered by



SMART SLIM WAFER LIGHT KIT 6 INCH

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit WiFi
- 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 6000K turnable white
- 38 dynamic scenarios
- Music syncs & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for outdoor soffits
- No hub required

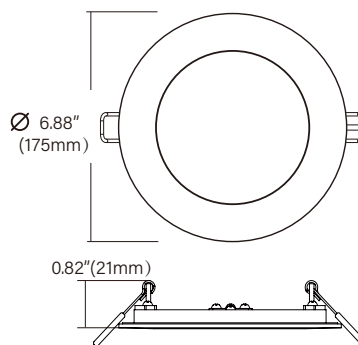

LED-6-S13W-RD-SWF

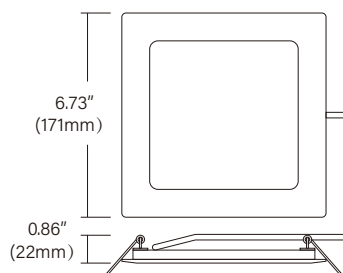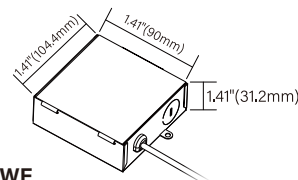

LED-6-S13W-SQ-SWF

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-6-S13W-RD-SWF	120VAC	13 Watts	RGB+CCT	1000lm@2700K	Round	Ø158mm/6.22inch	WH/BK/BN/ORB	ETL, FCC
LED-6-S13W-SQ-SWF	120VAC	13 Watts	RGB+CCT	1000lm@2700K	Square	Ø158mm/6.22inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice



LED-8-S18W-SWF-RD-WH




LED-8-S18W-SWF-SQ-WH

Powered by Works with Amazon Alexa


SMART SLIM WAFER LIGHT KIT 8 INCH

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit
- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 6000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for shower top
- No hub required

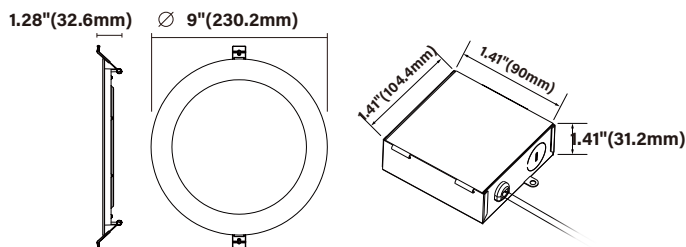

LED-8-S18W-SWF-RD-WH

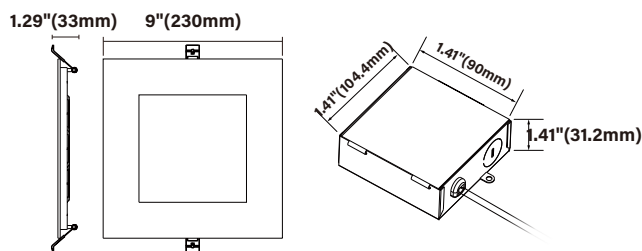

LED-8-S18W-SWF-SQ-WH

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-8-S18W-RD-SWF	120VAC	18 Watts	RGB+CCT	1500lm@2700K	Round	∅ 208mm/8.18inch	WH/BK/BN/ORB	ETL, FCC
LED-8-S18W-SQ-SWF	120VAC	18 Watts	RGB+CCT	1200lm@2700K	Square	∅ 210mm/8.26inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice



Works with
Hey Google



Amazon Alexa



IC
Rated



SMART RECESSED LINEAR HANDY PANEL LIGHT 1FT & 2FT

FEATURES

Canless solution as light, trim and remote junction 3 in 1 light kit

WiFi 2.4G APP control & voice control

RGB 16 millions color & 2700K - 6000K turnable white

38 dynamic scenarios

Music syns & group control

Timer setting for automatic on/off

1%-100% dimmable via Smart Life APP


IC rated & air tight

Suitable for wet locations for shower top

No hub required



LED-1FT-HD20W

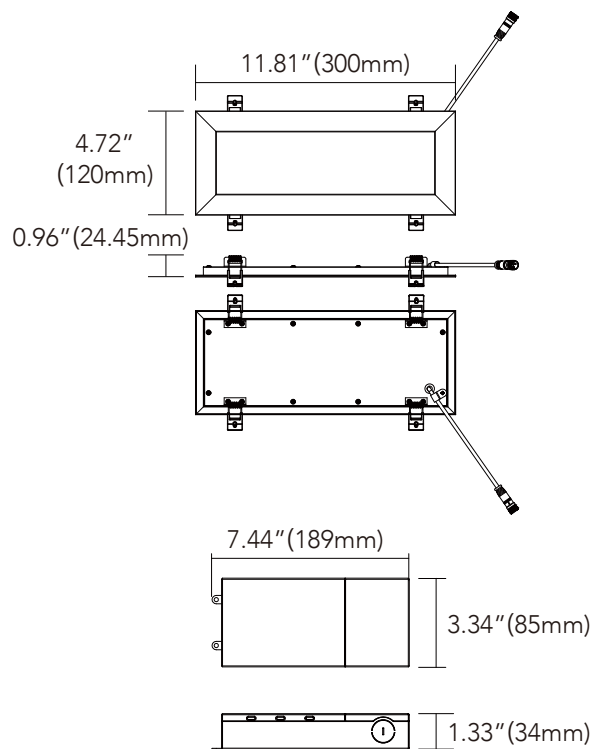

Note: Under Development

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-1FT-HD-20W-SWF	120VAC	20 Watts	RGB+CCT	1500lm@2700K	Square	285x106mm/11.22x4.17inch	White/Black/Brush Nickel/Bronze	ETL, FCC
LED-2FT-HD-38W-SWF	120VAC	38 Watts	RGB+CCT	2850lm@2700K	Square	585x106mm/23.03x4.17inch	White/Black/Brush Nickel/Bronze	ETL, FCC

Data subject to change without notice





LED-2FT-HD38W



SMART RECESSED LINEAR HANDY PANEL LIGHT 1FT & 2FT

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit
- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 6000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for shower top
- No hub required

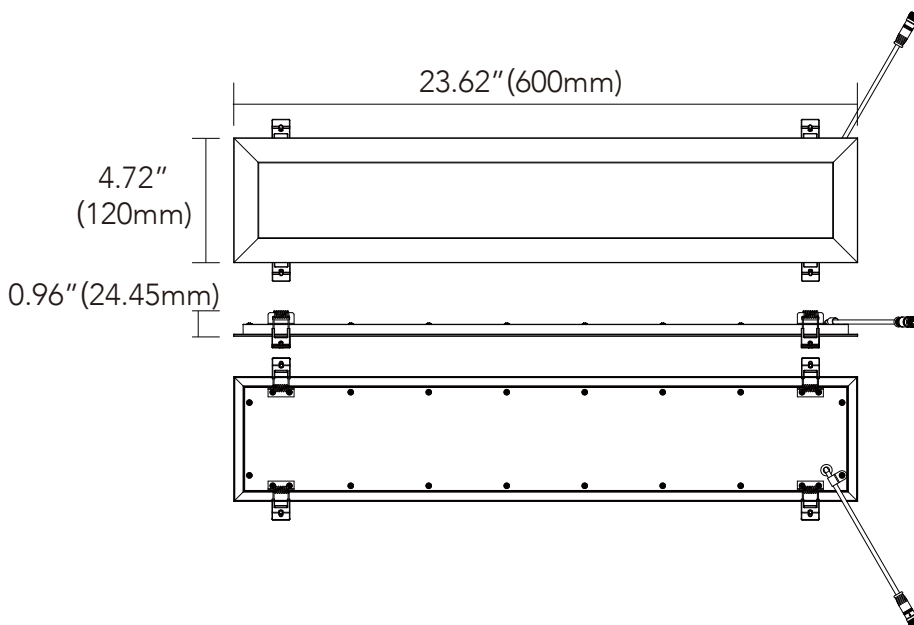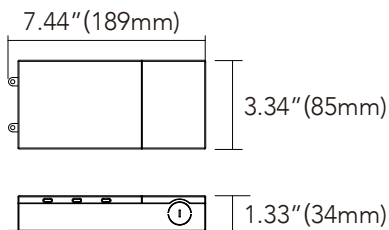

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-1FT-HD-20W-SWF	120VAC	20 Watts	RGB+CCT	1500lm@2700K	Square	285x106mm/1122x417inch	White/Black/Brush Nickel/Bronze	ETL, FCC
LED-2FT-HD-38W-SWF	120VAC	38 Watts	RGB+CCT	2850lm@2700K	Square	585x106mm/2303x417inch	White/Black/Brush Nickel/Bronze	ETL, FCC



Data subject to change without notice



SMART RECESSED GIMBAL LIGHT KIT 4 INCH & 6 INCH

FEATURES

- Canless solution as light, trim and remote junction 3 in 1 light kit 360° adjustable & 25° tilting
- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for outdoor soffits
- No hub required





LED-4G-SMD-10W-SWF



LED-4G-SMD-10W-SWF



LED-6G-SMD-15W-SWF

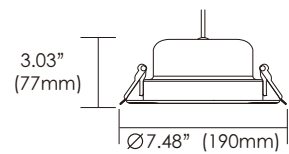

LED-6G-SMD-15W-SWF

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-4G-SMD-10W-SWF	120VAC	10 Watts	RGB+CCT	750lm@2700K	Round & Square	Ø110mm/4.33inch	WH/BK/BN/ORB	ETL, FCC
LED-6G-SMD-15W-SWF	120VAC	15 Watts	RGB+CCT	980lm@2700K	Round & Square	Ø160mm/6.29inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice





LED-35FGIM-7W-SWF





LED-4FGIM-9W-SWF





SMART FLOATING GIMBAL LIGHT KIT 3.5 INCH & 4 INCH

FEATURES


- Canless solution as light, trim and remote junction 3 in 1 light kit
- 360° adjustable & 80° tilting
- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for shower top
- No hub required

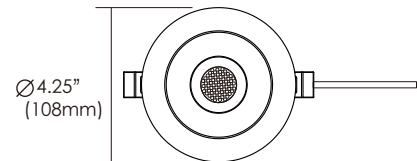


LED-35FGIM-7W-SWF

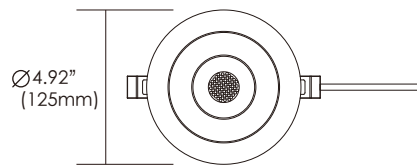

LED-4FGIM-9W-SWF



Horizontal Rotation 360°



Vertical Rotation 80°

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-35FGIM-7W-SWF	120VAC	7 Watts	RGB+CCT	660lm@2700K	Round & Square	Ø90mm/3.54inch	WH/BK/BN/ORB	ETL, FCC
LED-4FGIM-9W-SWF	120VAC	9 Watts	RGB+CCT	750lm@2700K	Round & Square	Ø105mm/4.13inch	WH/BK/BN/ORB	ETL, FCC

Data subject to change without notice



LED-DLR4-SWF




LED-DLR6-SWF




SMART CANLIGHT RETOFIT 4 INCH & 6 INCH

FEATURES

- Compatible with most of the standard housing cans 4" or 5-6" WiFi
- 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- IC rated & air tight
- Suitable for wet locations for shower top
- No hub required

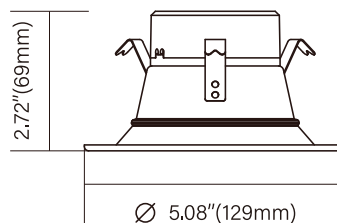


LED-DLR4-SWF

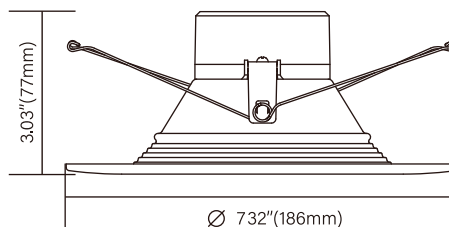

LED-DLR6-SWF

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-DLR4-SWF	120VAC	9 Watts	RGB+CCT	700lm@2700K	Round	WH/BK	ETL, FCC
LED-DLR6-SWF	120VAC	11 Watts	RGB+CCT	800lm@2700K	Round	WH/BK	ETL, FCC


Data subject to change without notice

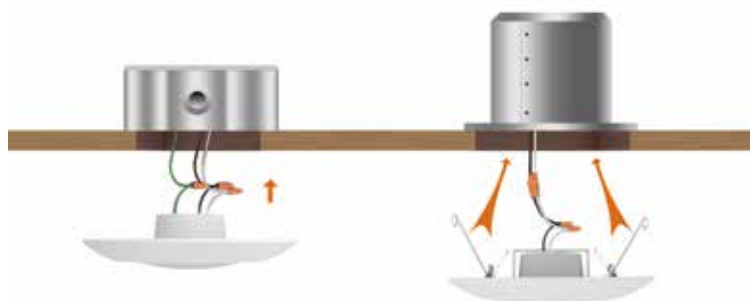


SMART RGB+CCT LOW PROFILE DISC DOWNLIGHT SERIES 6 INCH

FEATURES

- Low profile surface mount disc
- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syncs & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for wet locations for shower top
- No hub required
- Easy installation for 4o or 3o junction box
- Accessories for standard 5-6" housing can available

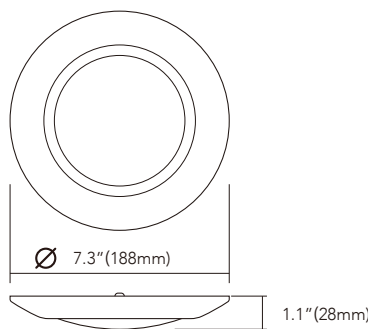

BLDK0615-SWF

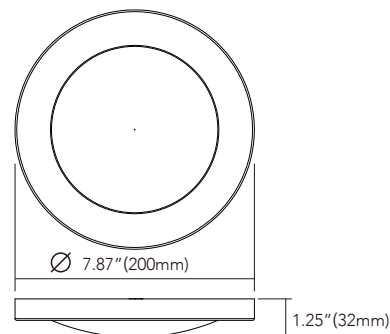


BLDK0615-G-SWF



Note: Under Development

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
BLDK0615-SWF	120VAC	15 Watts	RGB+CCT	900lm@2700K	Round	WH/BK/BN/ORB	ETL, FCC
BLDK0615-G-SWF	120VAC	15 Watts	RGB+CCT	900lm@2700K	Round	WH/BK/BN/ORB	ETL, FCC


Data subject to change without notice



SMART EDGELIT SLIM SURFACE MOUNT 12 INCH RGB+CCT

FEATURES

- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnabl white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for wet locations
- Easy installation for 4o or 3o junction box
- No hub required

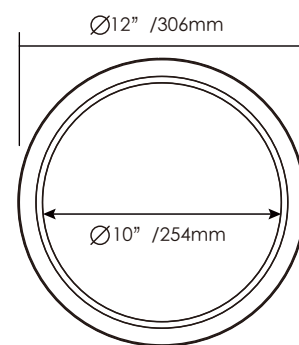

LED-SM12R-RGBW-SWF



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-SM12R-RGBW-SWF	120VAC	25 Watts	RGB+CCT	1800lm@2700K	Round	WH/BK/BN	ETL, FCC


Data subject to change without notice




SMART DOUBLE RING FLUSH MOUNT CEILING LIGHT RGB+CCT

FEATURES


- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for damp locations
- Easy installation for 4o or 3o junction box
- No hub required




FMDR-10-18W

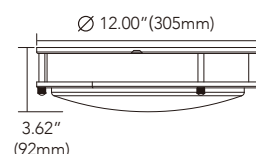

FMDR-12-18W

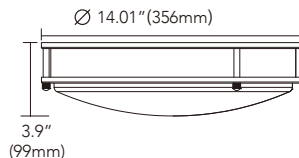

FMDR-14-25W

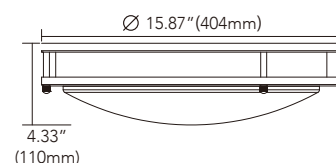

FMDR-16-25W



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
FMDR-10-18W-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Round	WH/BK/BN	ETL, FCC
FMDR-12-18W-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Round	WH/BK/BN	ETL, FCC
FMDR-14-25W-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN	ETL, FCC
FMDR-16-25W-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN	ETL, FCC


Data subject to change without notice




SMART SINGLE RING FLUSH MOUNT CEILING LIGHT RGB+CCT

FEATURES

- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syncs & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for damp locations
- Easy installation for 4o or 3o junction box
- No hub required

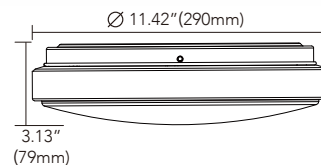

FMSR-11-18W-SWF

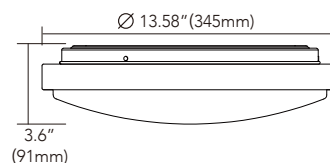


FMSR-13-25W-SWF



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
FMSR-11-18W-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Round	WH/BK/BN	ETL, FCC
FMSR-13-25W-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN	ETL, FCC


Data subject to change without notice

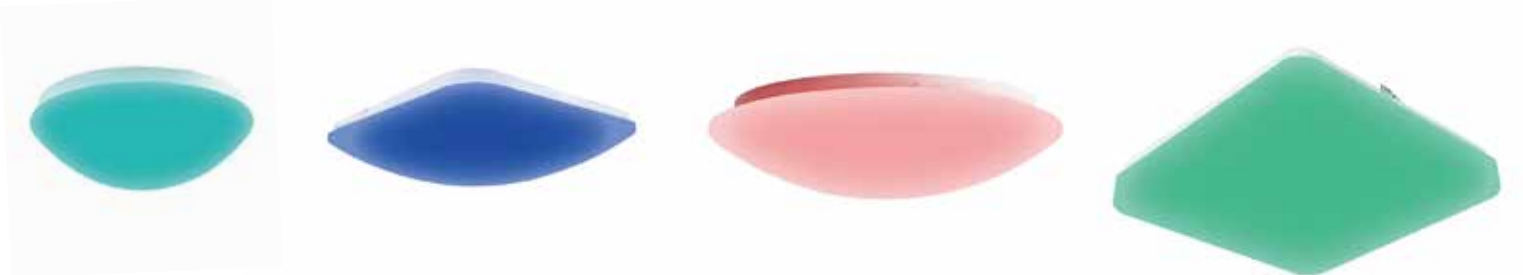


SMART MUSHROOM FLUSH MOUNT CEILING LIGHT RGB+CCT

FEATURES


- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syncs & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for damp locations
- Easy installation for 4o or 3o junction box
- No hub required

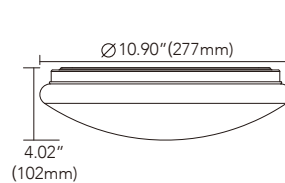


FMMR-11-18W-RD

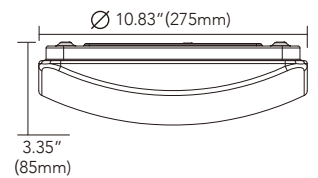

FMMR-11-18W-SQ

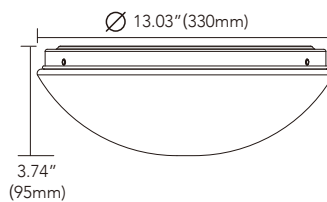

FMMR-13-25W-RD

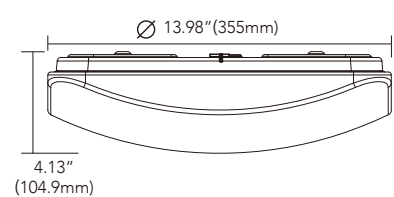

FMMR-14-25W-SQ



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
FMMR-11-18W-RD-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Round	WH/BK/BN	ETL, FCC
FMMR-11-18W-SQ-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Square	WH/BK/BN	ETL, FCC
FMMR-13-25W-RD-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN	ETL, FCC
FMMR-14-25W-SQ-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Square	WH/BK/BN	ETL, FCC


Data subject to change without notice




SMART LOW PROFILE & GLASS FLUSH MOUNT CEILING LIGHT RGB+CCT

FEATURES


- WiFi 2.4G APP control & voice control
- RGB 16 millions color & 2700K - 5000K turnable white
- 38 dynamic scenarios
- Music syns & group control
- Timer setting for automatic on/off
- 1%-100% dimmable via Smart Life APP
- Suitable for wet locations
- Easy installation for 4o or 3o junction box
- No hub required

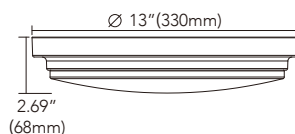

FMLP-13-25W

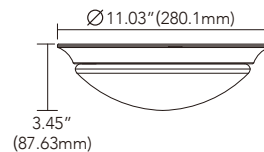

FMTD-11-18W

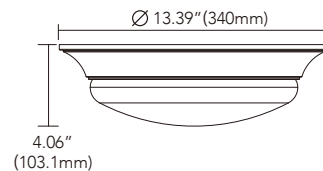

FMTD-13-25W



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
FMLP-13-25W-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN/ORB	ETL, FCC
FMTD-11-18W-SWF	120VAC	18 Watts	RGB+CCT	1100lm@2700K	Round	WH/BK/BN/ORB	ETL, FCC
FMTD-13-25W-SWF	120VAC	25 Watts	RGB+CCT	1500lm@2700K	Round	WH/BK/BN/ORB	ETL, FCC




Data subject to change without notice





EMERGENCY BATTERY BACKUP LIGHTING KIT SURFACE MOUNT

FEATURES



- Lithium battery backup module
- 24 hours recharge time
- >90 minutes operation after power failure
- 120-277VAC working
- 10%-100% Dimmable
- Switching time: < 1 second
- Over-charge / discharge protection
- Self-checking function
- Test button
- 5CCT selectable
- Easy installation onto 40/30 junction box

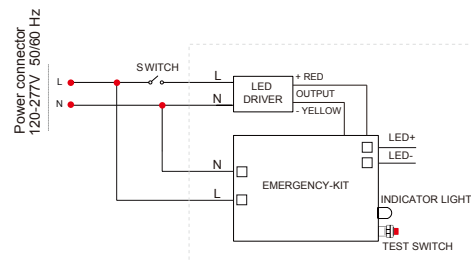

EMBKU-SM715

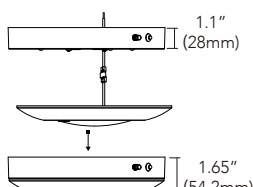

EMBKU-DL615

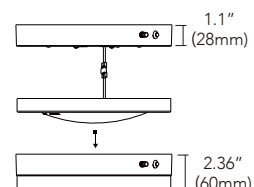

EMBKU-SL615



MODEL	VOLTAGE	POWER	CCT	LUMENS	POWER FAILURE LUMENS	LIGHT DIRECTION	SHARPE	FINISH	CERTIFICATE
EMBKU-SM715	120-277VAC	15 Watts	5CCT Selectable	1000lm@2700K	530lm@2700K	Edgelit	Round	WH/BK	ETL
EMBKU-DL615	120-277VAC	15 Watts	5CCT Selectable	1100lm@2700K	600lm@2700K	Direct Light	Round	WH/BK	ETL
EMBKU-SL615	120-277VAC	15 Watts	5CCT Selectable	1020lm@2700K	580lm@2700K	Direct Light	Round	WH/BK	ETL



Data subject to change without notice




EMERGENCY BATTERY BACKUP LIGHTING KIT RECESSED WITH METAL BOX

FEATURES


- Lithium battery backup module
- 24 hours recharge time
- >90 minutes operation after power failure
- 120-277VAC working
- 10%-100% Dimmable
- Switching time: < 1 second
- Over-charge / discharge protection
- Self-checking function
- Test button
- 5CCT selectable
- Suitable for wet location

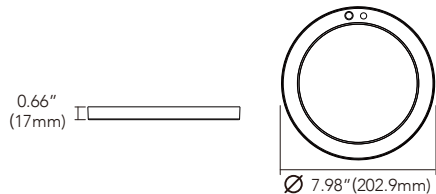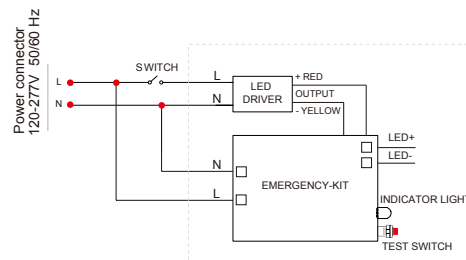

EMBKU-SM715-JB

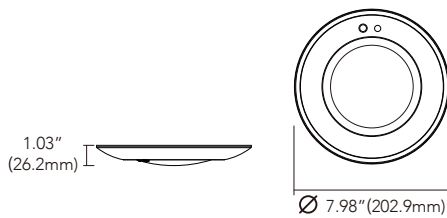

EMBKU-DL615-JB

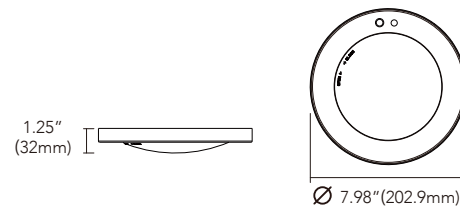

EMBKU-SL615-JB



Note: Under Development

MODEL	VOLTAGE	POWER	CCT	LUMENS	POWER FAILURE LUMENS	LIGHT DIRECTION	SHARPE	FINISH	CERTIFICATE
EMBKU-SM715-JB	120-277VAC	15 Watts	5CCT Selectable	1000lm@2700K	500lm@3000K	Edgelit	Round	WH/BK/BN	ETL
EMBKU-DL615-JB	120-277VAC	15 Watts	5CCT Selectable	1020lm@2700K	500lm@3000K	Direct Light	Round	WH/BK/BN/ORB	ETL
EMBKU-SL615-JB	120-277VAC	15 Watts	5CCT Selectable	1020lm@2700K	500lm@3000K	Direct Light	Round	WH/BK/BN/ORB	ETL



Data subject to change without notice




EMERGENCY BATTERY BACKUP DOUBLE RING CEILING LIGHT

FEATURES

- Lithium battery backup module
- 24 hours recharge time
- >90 minutes operation after power failure
- 120-277VAC working
- 10%-100% Dimmable
- Switching time: < 1 second
- Over-charge / discharge protection
- Self-checking function
- Test button
- 5CCT selectable
- Easy installation onto 40/30 junction box

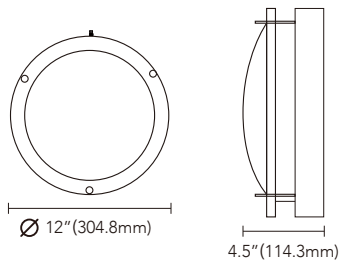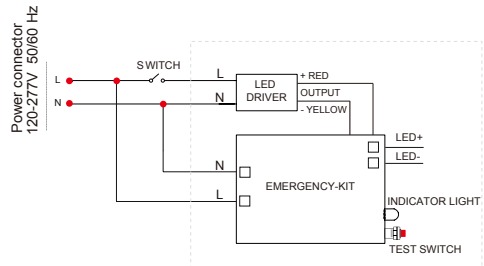

EMBKU-DR12

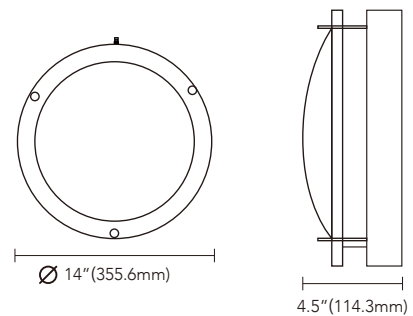

EMBKU-DR14



Note: Under Development

MODEL	VOLTAGE	POWER	CCT	LUMENS	POWER FAILURE LUMENS	LIGHT DIRECTION	SHARPE	FINISH	CERTIFICATE
EMBKU-DR12	120-277VAC	15 Watts	5CCT Selectable	1050lm@2700K	500lm@3000K	Direct Light	Round	BN/ORB	ETL
EMBKU-DR14	120-277VAC	15 Watts	5CCT Selectable	1050lm@2700K	500lm@3000K	Direct Light	Round	BN/ORB	ETL


Data subject to change without notice




LOW PROFILE SURFACE MOUNT CEILING DISC LIGHT 4 INCH & 6 INCH

FEATURES

- Over 80% energy saving
- DOB driverless technology
- Smooth Dimming 10%-100%
- Suitable for wet locations for shower top
- Easy installation onto 40/30 junction box
- Accessories for standard 4", 5-6" housing can available

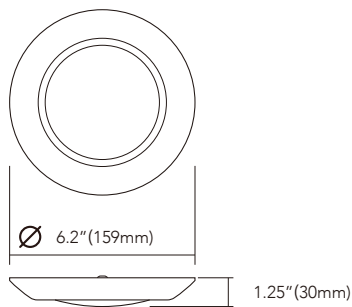

BLDK0410

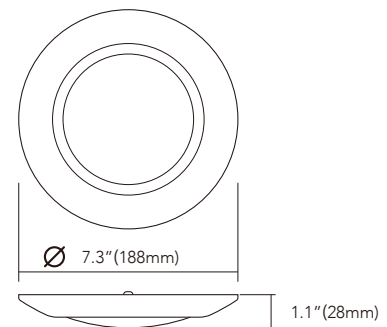

BLDK0615



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
BLDK0410	120VAC	10 Watts	1CCT/5CCT	600lm@2700K	Round	WH/BK/BN/ORB	ETL,ENERGY STAR
BLDK0615	120VAC	15 Watts	1CCT/5CCT	900lm@2700K	Round	WH/BK/BN/ORB	ETL,ENERGY STAR


Data subject to change without notice




SLIM FLAT CEILING DISC LIGHT 4 INCH & 6 INCH

FEATURES

- Super low Profile less than 1.3 inch height
- Over 80% energy saving
- DOB driverless technology
- Smooth Dimming 10%-100%
- Suitable for wet locations for shower top
- Easy installation onto 4ø/3ø junction box
- Accessories for standard 4", 5-6" housing can available

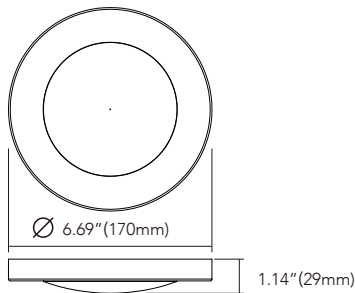

BLDK0410-G

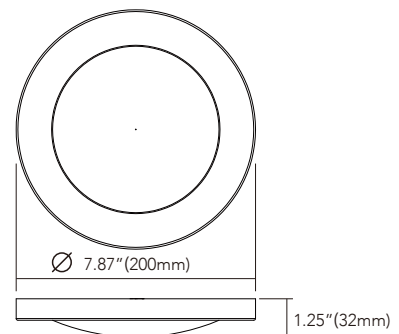

BLDK0615-G



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
BLDK0410-G	120VAC	10 Watts	1CCT/5CCT	600lm@2700K	Round	WH/BK/BN/ORB	ETL
BLDK0615-G	120VAC	15 Watts	1CCT/5CCT	900lm@2700K	Round	WH/BK/BN/ORB	ETL


Data subject to change without notice




PIR MOTION SENSING DISC CLOSET LIGHT 4 INCH & 6 INCH

FEATURES

- Super low Profile less than 1.3 inch height
- Over 80% energy saving
- DOB driverless technology
- Auto-ON/OFF when detecting motion
- Suitable for wet locations for shower top
- Easy installation onto 40/30 junction box
- Non-dimmable
- Accessories for standard 4", 5-6" housing can available

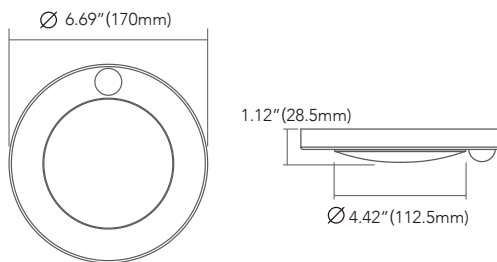

BLDK0410-PIR

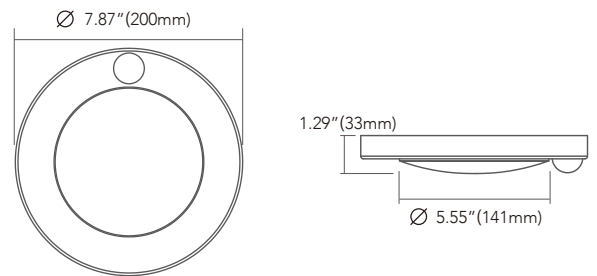

BLDK0615-PIR



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
BLDK0410-PIR	120VAC	10 Watts	1CCT/5CCT	600lm@2700K	Round	WH/BK/BN/ORB	ETL
BLDK0615-PIR	120VAC	15 Watts	1CCT/5CCT	900lm@2700K	Round	WH/BK/BN/ORB	ETL


Data subject to change without notice




EDGELIT SLIM SURFACE MOUNT CEILING DISC LIGHT 5-6-7-9 INCH

FEATURES


- Super slim and low profile
- Edgelit via light guide
- Even light distribution, no hot spot
- Compatible with most of the wall dimmers
- Quality flickering free light effect
- Easy installation for 4o or 3o junction box
- Suitable for wet locations for shower top
- Accessories for standard 4", 5-6" housing can available

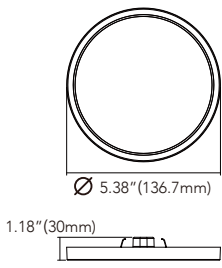


LED-SM5R

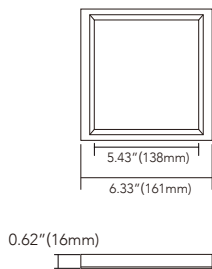

LED-SM6S

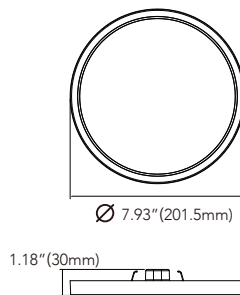

LED-SM7R

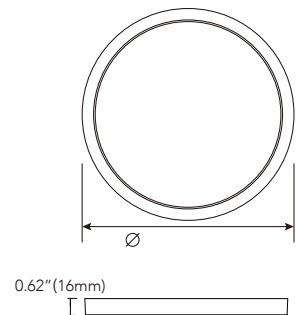


LED-SM9R



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-SM5R	120VAC	10 Watts	1CCT/5CCT	600lm@2700K	Round	WH/BK/SL/ORB	ETL
LED-SM6S	120VAC	15 Watts	1CCT/5CCT	900lm@2700K	Square	WH/BK/SL/ORB	ETL
LED-SM7R	120VAC	15 Watts	1CCT/5CCT	900lm@2700K	Round	WH/BK/SL/ORB	ETL
LED-SM9R	120VAC	18Watts	1CCT/5CCT	1100lm@2700K	Round	WH/BK/SL/ORB	ETL


Data subject to change without notice

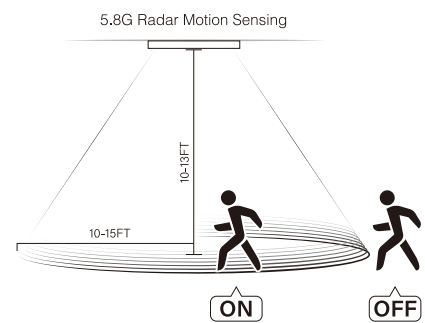

EDGELIT SLIM SURFACE MOUNT CEILING DISC LIGHT 12 INCH

FEATURES

- Super slim and low profile
- Edgelit via light guide
- Even light distribution, no hot spot
- Compatible with most of the wall dimmers
- Quality flickering free light effect
- Easy installation for 40 or 30 junction box
- Suitable for wet locations for shower top
- Radar motion sensing available for time delay 30-60s

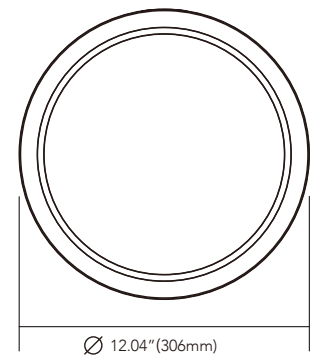

LED-SM12R



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-SM12R	120VAC	26 Watts	1CCT/3CCT	1800lm@2700K	Round	WH/BK/SL/ORB	ETL


Data subject to change without notice



EDGELIT SLIM SURFACE MOUNT CEILING DISC LIGHT 16 INCH

FEATURES

- Super slim and low profile
- Edgelit via light guide
- Even light distribution, no hot spot
- Compatible with most of the wall dimmers
- Quality flickering free light effect
- Easy installation for 4o or 3o junction box
- Suitable for wet locations for shower top

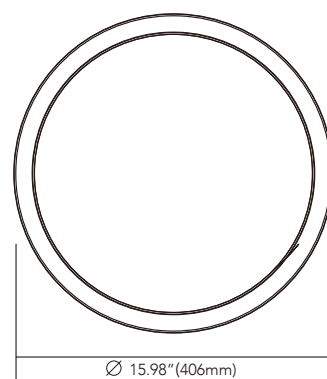

LED-SM16R



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-SM16R	120VAC	30 Watts	1CCT/3CCT	2400lm@2700K	Round	WH/BK/SL/ORB	ETL


Data subject to change without notice



3N1 EDGELIT SLIM SURFACE MOUNT DISC DOWNLIGHT 5 INCH & 7 INCH

FEATURES

- Super slim and low profile
- Even edgelit via light guide, no hotspot
- DOB driverless technology
- Compatible with most of the wall dimmers
- Quality flickering free light effect
- 5CCT field selectable
- Three mounting options from one fixture - Direct Ceiling, Recessed Housing & J-Box
- Install in e Air-Tight, IC and Wet Location ratings

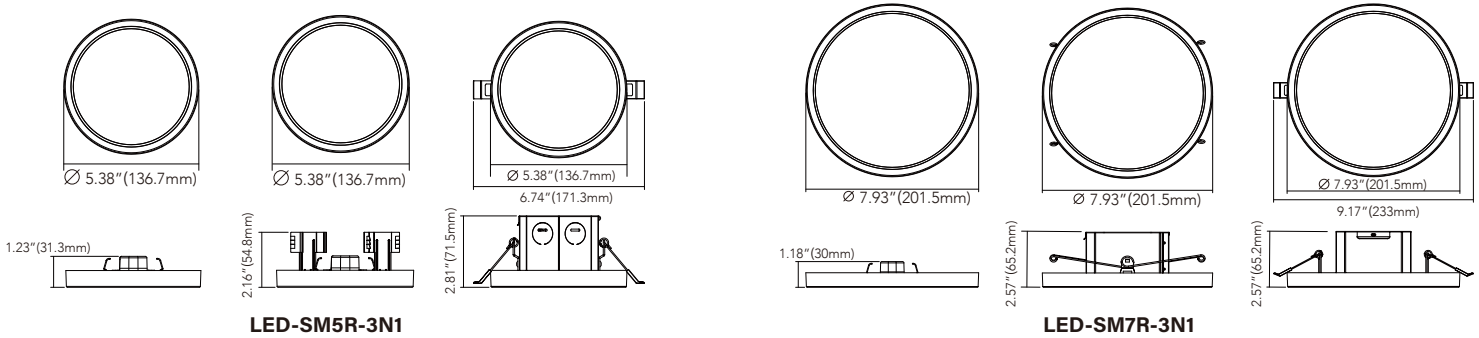

ETL BEING PROCESSED

MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-SM5R-3N1	120VAC	10 Watts	5CCT Selectable	600lm@2700K	Round	Φ102mm/4inch	WH/BK/BN	ETL
LED-SM7R-3N1	120VAC	15 Watts	5CCT Selectable	900lm@2700K	Round	Φ138mm/5.43inch	WH/BK/BN	ETL

Data subject to change without notice






3N1 FLAMELESS FLUSH MOUNT CEILING DISC DOWNLIGHT 4 INCH & 6 INCH

FEATURES

- Flameless design with even light distribution
- Quality flickering free light effect
- DOB driverless technology
- Compatible with most of the wall dimmers
- 5CCT field selectable
- Three mounting options from one fixture - Direct Ceiling, Recessed Housing & J-Box
- Install in many applications with the Air-Tight, IC and Wet Location ratings

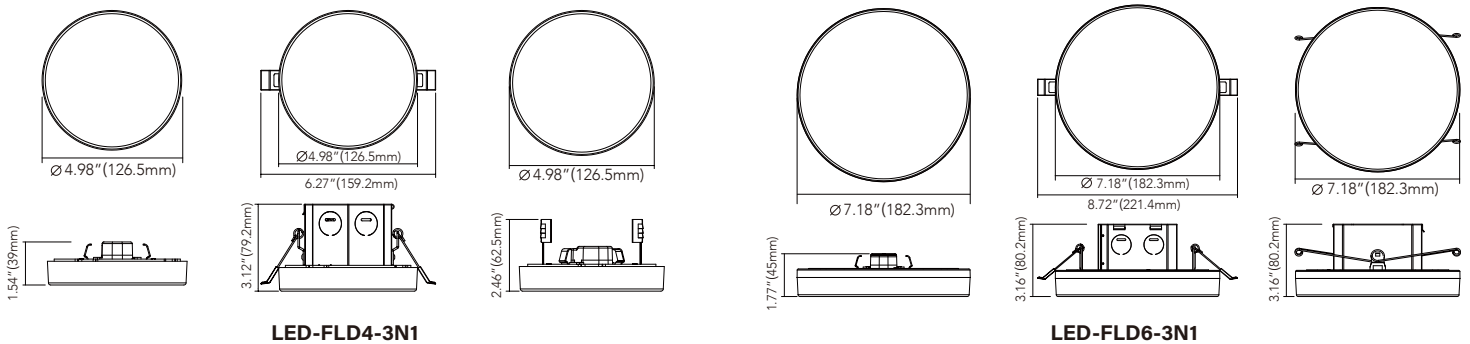


ETL BEING PROCESSED

MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-FLD4-3N1	120VAC	10 Watts	5CCT Selectable	600lm@2700K	Round	Φ102mm/4inch	WH/BK/BN	ETL
LED-FLD6-3N1	120VAC	15 Watts	5CCT Selectable	900lm@2700K	Round	Φ138mm/5.43inch	WH/BK/BN	ETL

Data subject to change without notice





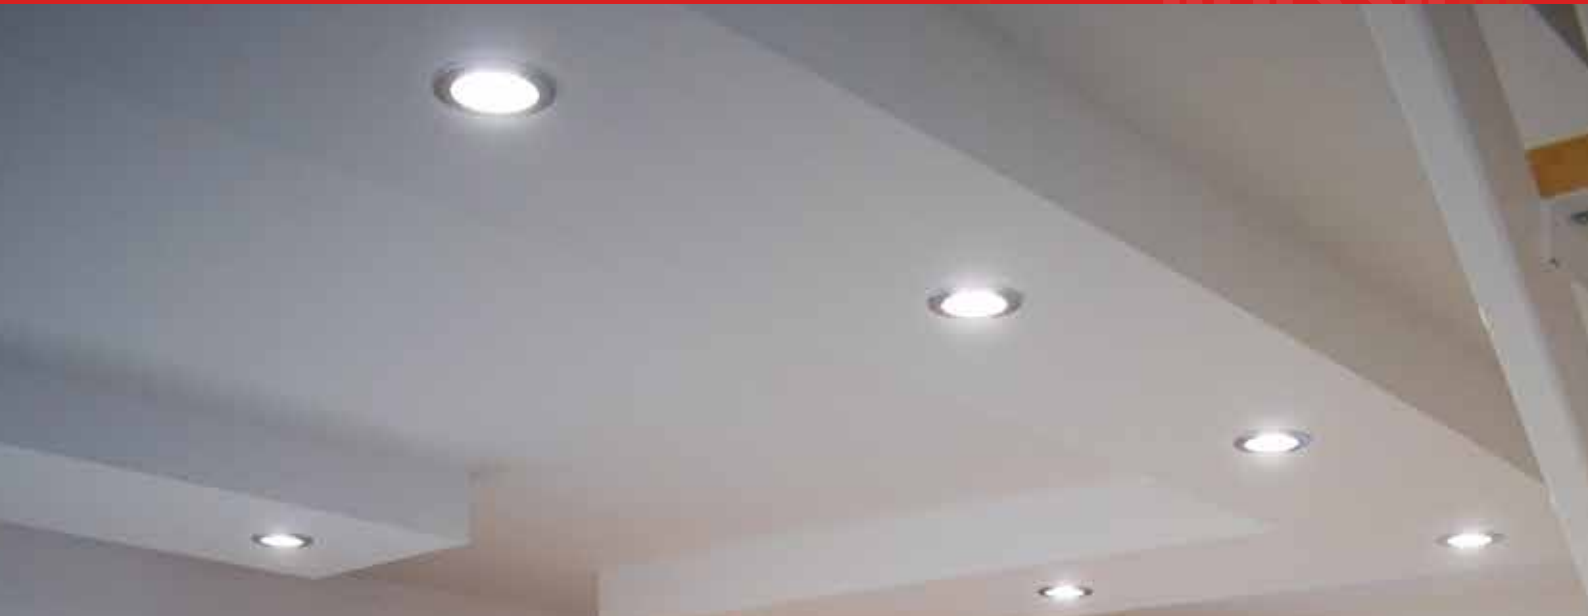

LED FLAT MINI SURFACE MOUNT LIGHT 4 INCH 5CCT SELECTABLE

FEATURES

- Changeable trim: white, black, ORB, silver etc.
- 5CCT selectable: 27K-30K-35K-40K-50K to meet various applications demands i.e. kitchen, bathroom, hallway, office
- Wet Location for using on shower top and/or outside under the soffit
- Easy installation onto 4 inch junction boxes only
- Energy saving of a perfect 60W incandescent bulb replacement
- Compatible with most of the wall dimmers 5%-100%
- Low profile and mini slim surface mount lights for any limited space

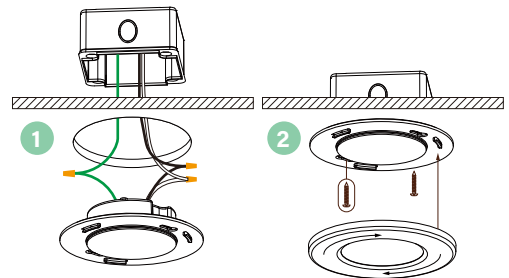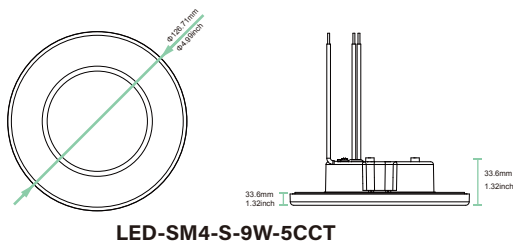

UNDER DEVELOPMENT

MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	FINISH	CERTIFICATE
LED-SM4-S-9W	120VAC	9Watts	5CCT/1CCT	650Lm@2700K	Round	WH/HK/ORB/SL	ETL
LED-SM4-S-11W	120VAC	11Watts	5CCT/1CCT	910Lm@5000K	Round	WH/BK/ORB/SL	ETL
LED-SM4-S-11W	120VAC	11Watts	5CCT/1CCT	850Lm@3000K	Round	WH/BK/ORB/SL	ETL





Data subject to change without notice



5CCT FIELD SELECTABLE DOUBLE RING FLUSH MOUNT SERIES

FEATURES

- Energy saving over 85%
- Smoothing dimming 5%-100%
- 5CCT selectable in 1 unit
- True color with high CRI>90
- Suitable for damp location
- Easy installation onto 4o/3o junction box
- Ideal for bedroom, bathroom, living room, kitchen, porch etc

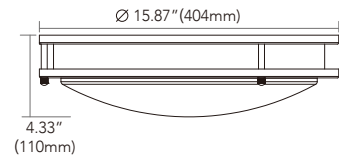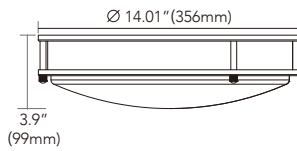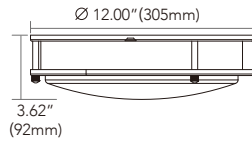

FMDR-10-18W

FMDR-12-18W

FMDR-14-25W

FMDR-16-25W



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
FMDR-10-18W	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Round	BK/BN/ORB	ETL
FMDR-12-18W	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Round	BK/BN/ORB	ETL
FMDR-14-25W	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	BK/BN/ORB	ETL
FMDR-16-25W	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	BK/BN/ORB	ETL


Data subject to change without notice




5CCT FIELD SELECTABLE SINGLE RING FLUSH MOUNT SERIES

FEATURES

- Energy saving over 85%
- Smoothing dimming 5%-100%
- 5CCT selectable in 1 unit
- True color with high CRI>90
- Suitable for damp location
- Easy installation onto 4o/3o junction box
- Ideal for bedroom, bathroom, living room, dining room, kitchen, porch etc

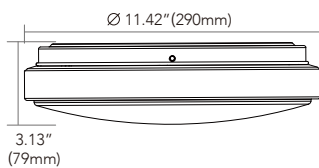

FMSR-11-18W

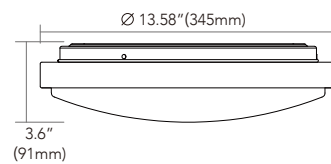

FMSR-13-25W



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
FMSR-11-18W	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Round	BN	ETL
FMSR-13-25W	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	BN	ETL


Data subject to change without notice




5CCT FIELD SELECTABLE MUSHROOM FLUSH MOUNT SERIES

FEATURES


- Energy saving over 85%
- Smoothing dimming 5%-100%
- 5CCT selectable in 1 unit
- True color with high CRI>90
- Suitable for damp location
- Easy installation onto 4o/3o junction box
- Ideal for bedroom, bathroom, living room, dining room, kitchen, porch etc

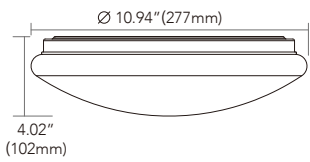


FMMR-11-18W-RD

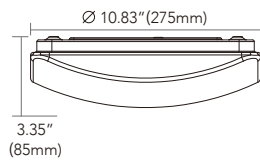

FMMR-11-18W-SQ

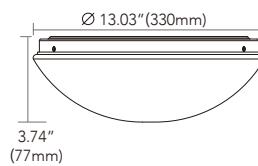

FMMR-13-25W-RD

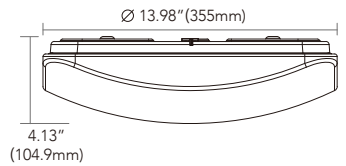

FMMR-13-25W-SQ



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
FMMR-11-18W-RD	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Round	WH	ETL
FMMR-11-18W-SQ	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Square	WH	ETL
FMMR-13-25W-RD	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	WH	ETL
FMMR-13-25W-SQ	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Square	WH	ETL


Data subject to change without notice




5CCT FIELD SELECTABLE LOW PROFILE & TRADITIONAL FLUSH MOUNT SERIES

FEATURES


- Energy saving over 85%
- Smoothing dimming 5%-100%
- 5CCT selectable in 1 unit
- True color with high CRI>90
- Suitable for damp location
- Easy installation onto 4o/3o junction box
- Ideal for bedroom, bathroom, living room, dining room, kitchen, porch etc

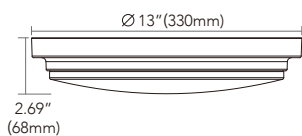

FMLP-13-25W

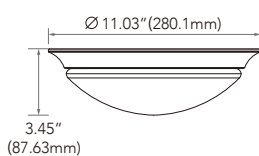

FMTD-12-18W

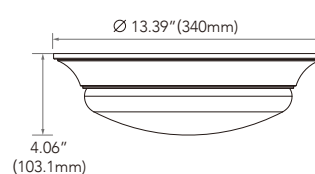


FMTD-13-25W



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CERTIFICATE
FMLP-13-25W	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	BK/BN/ORB	ETL
FMTD-12-18W	120VAC	18 Watts	5CCT Selectable	1000lm@2700K	Round	BK/BN/ORB	ETL
FMTD-13-25W	120VAC	25 Watts	5CCT Selectable	1500lm@2700K	Round	BK/BN/ORB	ETL


Data subject to change without notice




DEEP REGRESSED DOWNLIGHT KIT 3.5 INCH

FEATURES


- Easy installation with canless solution
- Deep regressed light without dazzling glare
- Solid die casting or cold forging heatsink
- Smooth dimming 10%-100% with most of the wall dimmers
- 360 degrees adjustable & fixed options
- Round & square die casting trim
- IC rated & air tight
- Suitable for wet locations for shower top
- Single CCT or 3/5CCT selectable

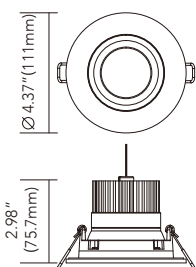


LED-35AD-12W

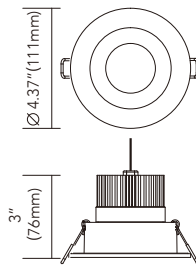


LED-35FX-12W

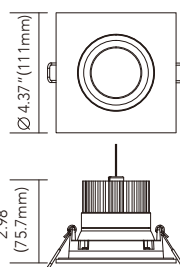

LED-35AD-12W-SQ

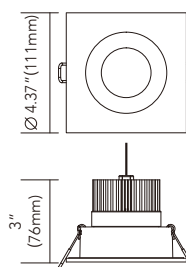

LED-35FX-12W-SQ



Junction Box



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-35AD-12W	120 VAC	12 Watts	3CCT	800lm	Round	Φ 92mm/3.62inch	WH/BK/BN/ORB	ETL
LED-35FX-12W	120 VAC	12 Watts	3CCT	800lm	Round	Φ 92mm/3.62inch	WH/BK/BN/ORB	ETL
LED-35AD-12W-SQ	120 VAC	12 Watts	3CCT	800lm	Square	Φ 92mm/3.62inch	WH/BK/BN/ORB	ETL
LED-35FX-12W-SQ	120 VAC	12 Watts	3CCT		Square	Φ 92mm/3.62inch	WH/BK/BN/ORB	ETL


Data subject to change without notice.




FLOATING GIMBAL RECESSED LIGHT KIT 3.5 INCH & 4 INCH

FEATURES

- Easy installation with canless solution
- 360° rotation and 80° tilting, multi-directional gimbal
- Solid die casting trim & heatsink
- Smooth dimming 10%-100% with most of the wall dimmers
- Narrow flood light beam 38°
- IC rated & air tight
- Suitable for wet locations for shower top
- Single CCT or 3/5CCT selectable

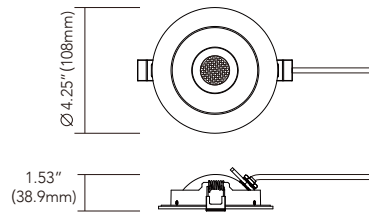

LED-35FGIM-8W-RD

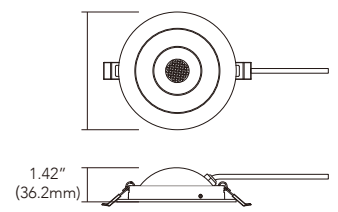

LED-4FGIM-9W-RD



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-35FGIM-8W-RD	120 VAC	8 Watts	3CCT/5CCT	660lm	Round	Φ 90mm/3.54inch	WH/BK/BN/ORB	ETL
LED-35FGIM-8W-SQ	120 VAC	8 Watts	3CCT/5CCT	660lm	Square	Φ 90mm/3.54inch	WH/BK/BN/ORB	ETL
LED-4FGIM-9W-RD	120 VAC	9 Watts	3CCT/5CCT	750lm	Round	Φ 106mm/4.17inch	WH/BK/BN/ORB	ETL
LED-4FGIM-9W-SQ	120 VAC	9 Watts	3CCT/5CCT	750lm	Square	Φ 106mm/4.17inch	WH/BK/BN/ORB	ETL
LED-4FGIM-12W-RD	120 VAC	12 Watts	3CCT/5CCT	1000lm	Round	Φ 106mm/4.17inch	WH/BK/BN/ORB	ETL
LED-4FGIM-12W-SQ	120 VAC	12 Watts	3CCT/5CCT		Square	Φ 106mm/4.17inch	WH/BK/BN/ORB	ETL


Data subject to change without notice.




MULTIPLE FLOATING GIMBAL LIGHT KIT 2 HEADS & 3 HEADS

FEATURES

- 360° rotation and 80° tilting, multi-directional gimbal
- Solid die casting trim & heatsink
- Smooth dimming 10%-100% with most of the wall dimmers
- Narrow flood light beam 38°
- IC rated & air tight
- Suitable for wet locations for high ceiling
- 5CCT filed selectable for various applications

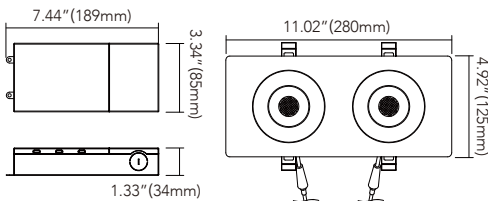

LED-4FGIM-24W-2H

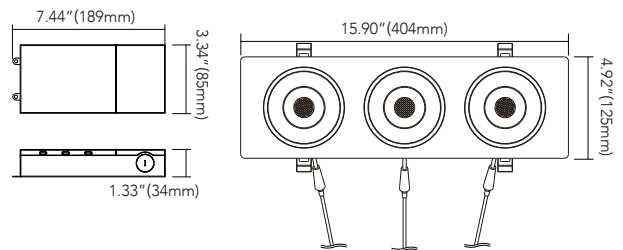

LED-4FGIM-36W-3H



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	FINISH	CUT OUT	CERTIFICATE
LED-4FGIM-24W-2H	120 VAC	24 Watts	5CCT	2000lm	Square	WH/BK	230x103mm 9.05x4.05inch	ETL
LED-4FGIM-36W-3H	120 VAC	35 Watts	5CCT	3000lm	Square	WH/BK	355x103mm 13.97x4.05inch	ETL




Data subject to change without notice





PREMIUM COB RECESSED GIMBAL LIGHT KIT 2-3-4 INCH

FEATURES


- Easy installation with canless solution
- 360° rotation and 80° tilting, multi-directional gimbal
- Solid die casting trim & heatsink
- Smooth dimming 10%-100% with most of the wall dimmers
- Narrow flood light beam 38°
- IC rated & air tight
- Suitable for wet locations for shower top
- Single CCT or 3/5CCT selectable

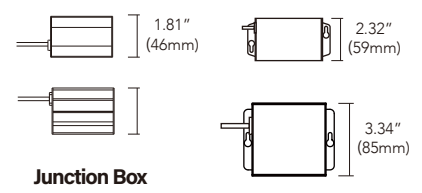



LED-2-5W-EY





LED-2-5W-SQ





LED-3-7W-EY



LED-3-7W-SQ

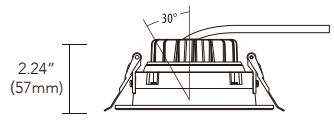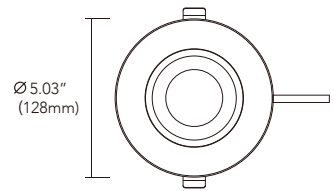

LED-4-11W-EY

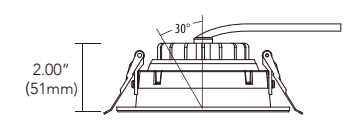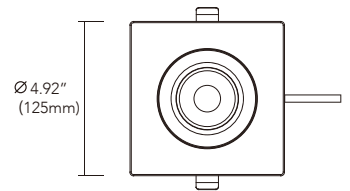

LED-4-11W-SQ



MODEL	VOLTAGE	POWER	COLOR	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-2-5W-EY	120 VAC	5 Watts	3CCT/5CCT	350lm	Round	Φ50mm/1.96inch	WH/BK/BN	ETL
LED-2-5W-SQ	120 VAC	5 Watts	3CCT/5CCT	350lm	Square	Φ50mm/1.96inch	WH/BK/BN	ETL
LED-3-7W-EY	120 VAC	7 Watts	3CCT/5CCT	600lm	Round	Φ70mm/2.75inch	WH/BK/BN	ETL
LED-3-7W-SQ	120 VAC	7 Watts	3CCT/5CCT	600lm	Square	Φ70mm/2.75inch	WH/BK/BN	ETL
LED-4-11W-EY	120 VAC	11 Watts	3CCT/5CCT	1000lm	Round	Φ105mm/4.13inch	WH/BK/BN	ETL
LED-4-11W-SQ	120 VAC	11 Watts	3CCT/5CCT	1000lm	Square	Φ105mm/4.13inch	WH/BK/BN	ETL


Data subject to change without notice




ECONOMIC SMD RECESSED GIMBAL LIGHT KIT 3-4-6 INCH

FEATURES


- Easy installation with canless solution
- Excellent heat dissipation performance
- 360° rotation and 25° tilting, multi-directional gimbal
- Smooth dimming 10%-100% with most of the wall dimmers
- Narrow flood light beam 38° or 60°
- IC rated & air tight
- Suitable for wet locations for shower top
- Single CCT or 3CCT selectable




LED-3G-SMD-7W



LED-4G-SMD-12W

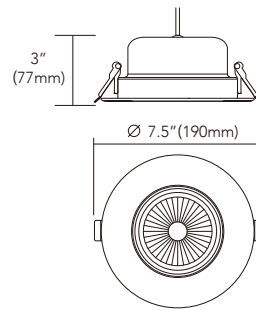

LED-6G-SMD-16W



Junction Box



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-3G-SMD-7W	120 VAC	7 Watts	3CCT	500lm	Round	Φ85mm/3.34inch	WH/BK	ETL
LED-4G-SMD-12W	120 VAC	12 Watts	3CCT	800lm	Round	Φ110mm/4.33inch	WH/BK	ETL
LED-6G-SMD-16W	120 VAC	16Watts	3CCT	1100lm	Round	Φ160mm/6.29inch	WH/BK	ETL


Data subject to change without notice



MINI MULTIPLE NUGGETS RECESSED LIGHT KIT 1-3-4-5-9-10 CELLS

FEATURES

- Unique mini multiple square recessed light in different sizes
- All die casting heatsink maintains great heat management performance
- Integrated with high lumens LED chip and quality driver
- TIR & reflector optics offers 9 types of beams to meet various demands.
- IC rated & air tight and suitable for damp location
- Smooth dimming in TRIAC/ELV 10%-100% & 0-10V

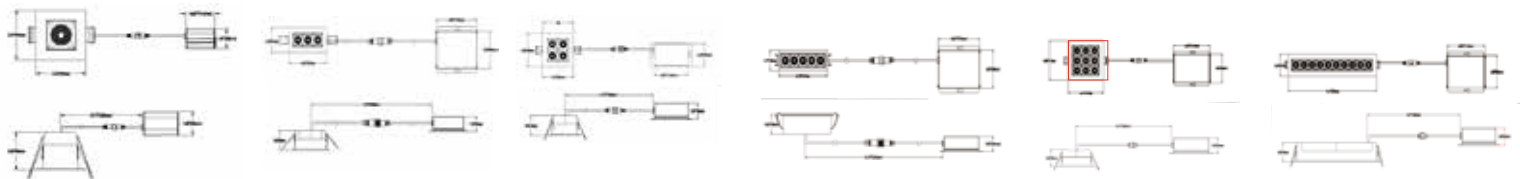

LNR01C-05W

LNR03C-09W

LNR04C-12W

LNR05C-15W

LNR09C-27W

LNR10C-30W



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LNR01C-05W	120 VAC	5 Watts	2700K,3000K,4000K	420lm	Square	55x47mm 2.16x1.85inch	WH/BK	ETL
LNR03C-09W	120 VAC	9 Watts	2700K,3000K,4000K	720lm	Square	105x39mm 4.13x1.53inch	WH/BK	ETL
LNR04C-12W	120 VAC	12 Watts	2700K,3000K,4000K	960lm	Square	80x72mm 3.14x2.83inch	WH/BK	ETL
LNR05C-15W	120 VAC	15 Watts	2700K,3000K,4000K	1200lm	Square	137x35mm 5.39x1.37inch	WH/BK	ETL
LNR09C-27W	120 VAC	27 Watts	2700K,3000K,4000K	2160lm	Square	102x102mm 4.01x4.01inch	WH/BK	ETL
LNR10C-30W	120 VAC	30 Watts	2700K,3000K,4000K	2400lm	Square	282x39mm 11.10x1.53inch	WH/BK	ETL


Data subject to change without notice



BEVEL MICRO RAY LIGHT KIT 5-10-15 CELLS

FEATURES

- Die casting heat sink maintains excellent heat management performance
- Unique narrow trim design with clips
- IC rated for direct contact with insulation in ceilings
- Three dimensions in 5-10-15 cells, construction building
- Beams in spot 15°, narrow flood 30°, medium flood 45°
- Compatible with industry standard TRIAC/ELV dimmers 10%-100%
- Suitable for damp locations

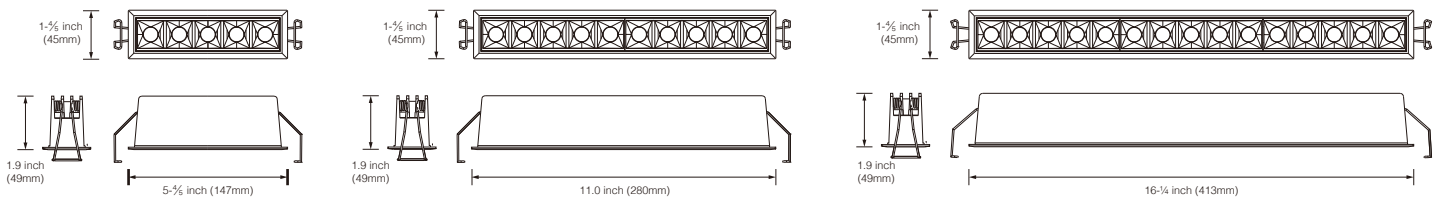

EQMRL10W

EQMRL20W

EQMRL30W



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
EQMRL10W	120 VAC	10 Watts	2700K,3000K,4000K	750lm	Square	137x35mm 5.39x1.37inch	WH/BK	ETL
EQMRL20W	120 VAC	20 Watts	2700K,3000K,4000K	1500lm	Square	271x36mm 10.66x1.41inch	WH/BK	ETL
EQMRL30W	120 VAC	30 Watts	2700K,3000K,4000K	2400lm	Square	402x35mm 15.82x1.37inch	WH/BK	ETL

Data subject to change without notice



TRIMLESS BEVEL MICRO RAY LIGHT KIT 5-10-15 CELLS

FEATURES

Die casting heat sink maintains excellent heat management performance

IC rated for direct contact with insulation in ceilings


Three dimensions in 5-10-15 cells, construction building

Beams in spot 15°, narrow flood 30°, medium flood 45°

Compatible with industry standard TRIAC/ELV dimmers 10%-100%

Suitable for damp locations

Unique trimless design with frame for new construction plaster

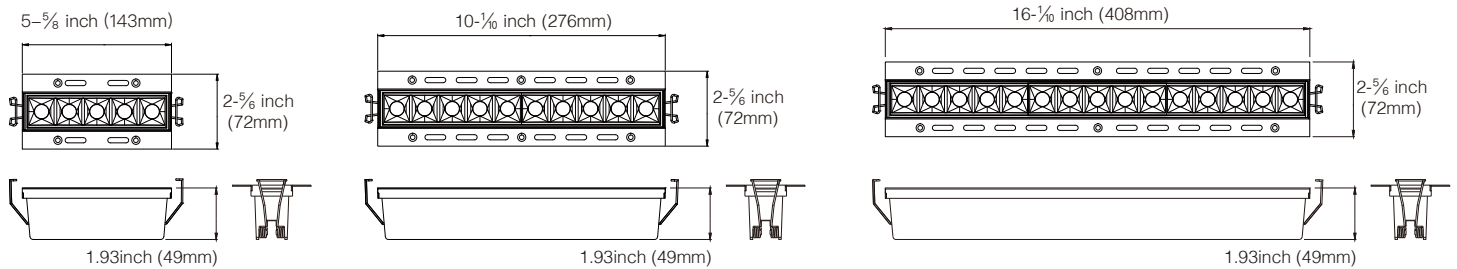

EQMRL10W-TL

EQMRL20W-TL

EQMRL30W-TL



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
EQMRL10W-TL	120 VAC	10 Watts	2700K,3000K,4000K	750lm	Square	146x40mm 5.74x1.57inch	WH/BK	ETL
EQMRL20W-TL	120 VAC	20 Watts	2700K,3000K,4000K	1500lm	Square	288x41mm 11.33x1.61inch	WH/BK	ETL
EQMRL30W-TL	120 VAC	30 Watts	2700K,3000K,4000K	2400lm	Square	410x40mm 16.14x1.57inch	WH/BK	ETL


Data subject to change without notice




BEVEL MICRO RAY LIGHT WALL WASHER 5-10-15 CELLS

FEATURES


- Die casting heat sink maintains excellent heat management performance
- Unique narrow trim design with clips
- IC rated for direct contact with insulation in ceilings
- Three dimensions in 1-2-3 slots construction building
- Optics in wall washing for highlighting artwork
- Compatible with industry standard TRIAC/ELV dimmers 10%-100%
- Suitable for damp locations

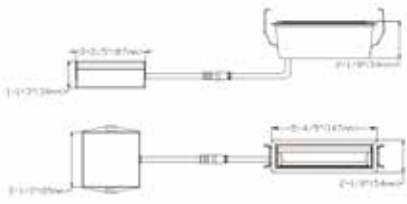

EQMRL10W-WW

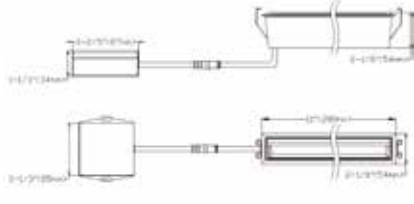

EQMRL20W-WW

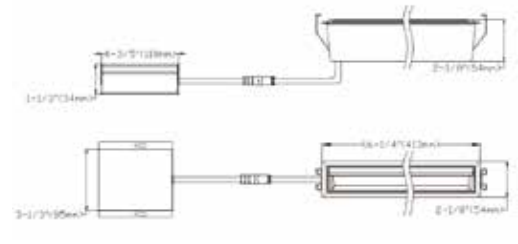

EQMRL30W-WW



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
EQMRL10W-WW	120 VAC	10 Watts	2700K,3000K,4000K	420lm	Square	137x35mm 5.39x1.37inch	WH/BK	ETL
EQMRL20W-WW	120 VAC	20 Watts	2700K,3000K,4000K	1000lm	Square	271x36mm 10.66x1.41	WH/BK	ETL
EQMRL30W-WW	120 VAC	30 Watts	2700K,3000K,4000K	1350lm	Square	402x35mm 15.82x1.37inch	WH/BK	ETL

Data subject to change without notice






BEVEL MICRO RAY LIGHT KIT ADJUSTABLE 10-15 CELLS

FEATURES

- Die casting heat sink maintains excellent heat management performance
- IC rated for direct contact with insulation in ceilings
- Two dimensions in 10-15 cells construction building
- Adjustable tilting 30° for highlighting artwork
- Beams in spot 15°, narrow flood 30°, medium flood 45°
- Compatible with industry standard TRIAC/ELV dimmers 10%-100% or 0-10V dimming
- Suitable for damp locations



EQMRL20W-AD

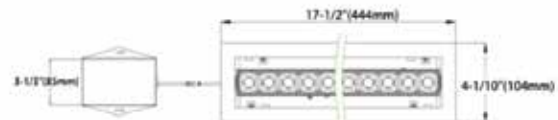


EQMRL30W-AD



MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
EQMRL20W-AD	120 VAC	20 Watts	2700K,3000K,4000K	1500lm	Square	290x85mm 11.41x3.34inch	WH/BK	ETL
EQMRL30W-AD	120 VAC	30 Watts	2700K,3000K,4000K	2400lm	Square	420x85mm 16.53x3.34inch	WH/BK	ETL

Data subject to change without notice





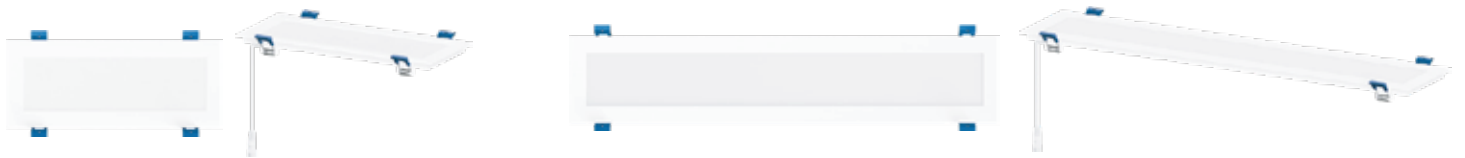

LINEAR RECESSED FLAT HANDY PANEL LIGHT 1FT & 2FT

FEATURES

- Unique linear recessed flat panel lights
- Easy installation with canless solution
- Smooth dimming 10%-100% with most of the wall dimmers
- Edgelit distributes even light effect
- IC rated & air tight
- Suitable for wet locations for high ceiling etc
- 5CCT filed selectable for various applications

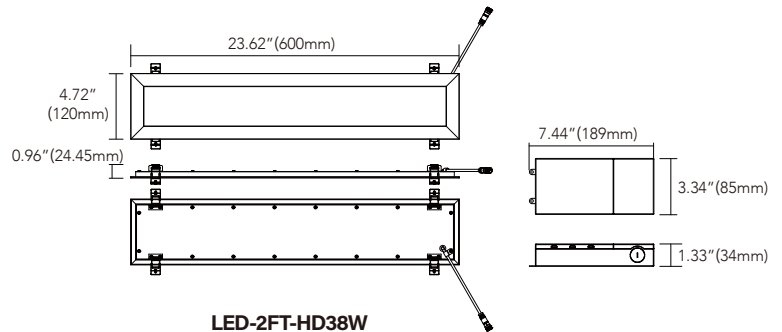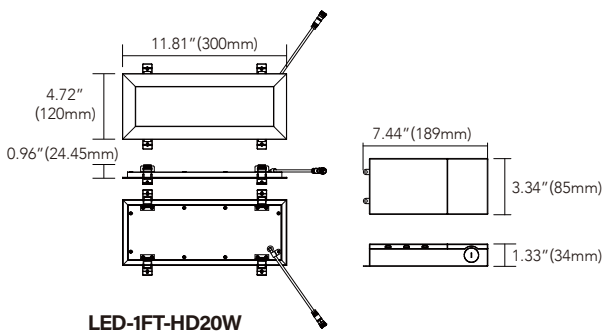

Note: Under Development

MODEL	VOLTAGE	POWER	CCT	LUMENS	SHARPE	CUT OUT	FINISH	CERTIFICATE
LED-1FT-HD20W	120 VAC	20 Watts	5CCT	1300lm	Square	285x106mm 11.22x4.17inch	WH/BK	ETL
LED-2FT-HD38W	120 VAC	38 Watts	5CCT	2470lm	Square	585x106mm 23.03x4.17inch	WH/BK	ETL

Data subject to change without notice

